



TECHNICAL DATA SHEET – SUPER CHROME

HX30SCH00B

90- μ m, high performance, multi-layered, cast films, which are coated with a pressure-sensitive, solvent-based, acrylic adhesive. Structured adhesive for faster application and air egress. Specially designed for temporary vehicle wraps. Their relative conformability enables you to cover certain curved or 3D-textured surfaces. Gloss surface finish with mirror effect.

FILM FEATURES:

	<u>Indicative value</u>	
• Thickness (μ m):	90	
	<u>Average values</u>	<u>Standard</u>
• Tensile strength (N/25 mm):	min. 15	HEXNFX41021
• Elongation at break (%):	min. 90	HEXNFX41021
• Shrinkage 168 hours at 70 °C (158 °F) (mm):	< 0.4	HEXRET001

LINER:

- Clear PET film, surface protection.
- Embossed, silicone-coated PET liner, 100 μ m.
- Stable under hygrometric variations.

ADHESIVE PROPERTIES:

(Measured average values at publication of the technical data sheet)

	<u>Average values</u>	<u>Standard</u>
• Peel strength test 180° on glass (N/25 mm):		HEXFTM001
after 20 minutes of application	15	
after 24 hours of application	18	
• Initial tack (N/25 mm):	16	HEXFTM009
• Release (N/25 mm):	0.1	HEXFTM003

ADHESIVE:

- Solvent-based acrylic adhesive.
- Structured adhesive for faster application and air egress.
- Immediate and permanent adhesion, optimal after 24 hours of contact.
- Dry application.

USER'S INSTRUCTIONS:

Caution: The surface of the Super Chrome film is protected by a protection film. This protective film must be removed right before cutting or applying.

- Gloves (GANTSCOV) must be worn for handling the film after removal of the surface protection film.

Super Chrome films are fragile and sensitive to scratching or marking.

- Relatively conformable product, only suitable for rolling devices and rolling vehicles.

Computer-aided cutting is at the customer's judgement.

- Recommended minimum application temperature: +20 °C (+68 °F). Apply preferably between 20 °C and 25 °C (68 °F and 77 °F).
- Operating temperature range: -40 °C to +90 °C (-40 °F to +194 °F).
- The film must only be applied by a qualified professional.
- The film must be thoroughly inspected in detail after removal of the surface protection and before removal of the HEX'PRESS liner.

HEXIS disengage from any liability in the case of complaints produced after the report of an appearance flaw (scratches, bubbles, matt area...) made during removal of the HEX'PRESS liner or renewed cutting and winding of the film.

- Cut the film to the size of the part to be wrapped, allowing +10 cm (4 in.) of extra margin.
- The roll must be closed immediately and properly (Tiro) after use.

The remaining film must be stored on its original core to let the film keep an optimal aspect.

- It is recommended to remove all removable components (those might hinder the application: covers, strips, indicator lights...).
- The application surface must be clean, dry, smooth, non-porous and free of any traces of oil, grease, wax, silicon or components obtained via nanotechnology processes.

HEXIS disengage from any liability in the case of complaints produced after lifting of the film occurred after the non-respect of the cleaning instructions for the substrate described in the Application Guide available on the "Professionals" pages, category "Wrap vinyls", on our site www.hexis-graphics.com.

- To enhance the surface sliding of the squeegee on the film while limiting the risk of scratches during application, it is highly recommended to spray our application liquid MAGICSPRAY on the squeegee surface covered with new felt.
- For all already painted substrates, apply only to original, undamaged, correctly prepared paintwork, or on paintwork that matches the manufacturer's quality requirements and specifications. This type of paintworks must be dried and entirely degassed at the time of wrapping.

HEXIS disengage from any liability for applications made on non-conform or incompatible substrates.

- Heating temperature of the film during application procedures: 30 °C to 40 °C (86 °F to 104 °F).
- Maximum acceptable deformation: 20 %.

Given their composition, Super Chrome films can undergo a slight and irreversible alteration of their appearance (whitening, loss of gloss...) if the films are stretched / deformed beyond their limit. This type of defect is not covered by the HEXIS warranty.

- As much as possible, make the finishing cuts around 3 mm (0.12 in.) wider than the surface to be wrapped. Then apply the surplus film to the adjacent or opposite sides, under the seals and strips, etc.

This procedure aims to limit the risk of the product peeling off, caused by the mechanical constraints exerted on the edges of the film.

- Carry out a finishing cleaning procedure of the totality of the covering, using the product LASERWASH by PROTECH® and a microfiber cloth in order to remove any impurities that can have been deposited during application of the film, taking care of not focusing too heavily on the edges.
- Super Chrome films get dirty more easily than any other gloss PVC film. This type of film requires more gentle and more thorough cleaning than any other film with, depending upon the case, a natural sponge or microfiber cloth, water or the PROTECH® products distributed by HEXIS.

Caution: Wait 92 hours after application, so that the adhesion be optimal, before carrying out the first cleaning procedure with water.

HEXIS disengage from any liability for cleaning procedures performed with products with undetermined additives, high pressure or automatic cleaning equipment, or any methods not specifically approved by HEXIS in writing.

OPERATING RECOMMENDATIONS:

- Recommendations (whenever possible): Sunlight and prolonged exposure to weathering and pollution may provoke ageing of the film⁽¹⁾. A vehicle wrapped with Super Chrome film must be protected from the weather (rain, dew...) as often as possible: during the day, park in the shade; at night, park the vehicle in a closed garage (otherwise, cover the vehicle with a loose protective cover).
- The colour of the films is monitored by HEXIS to ensure a faithful reproduction of their tints. Nevertheless, should your project require the use of several rolls of the same colour reference, HEXIS recommend using a single batch number of this reference.
- For each project, a sample (size: approximately A4 format) of each roll must be archived.

HEXIS keep the right to refuse any client complaint for which the client is unable to provide with the unused samples suspected of non-conformity.

- For further information on the application method of the Super Chrome films, please refer to the Application Guide available under the "Professionals" heading, category "Wrap vinyls", on our site www.hexis-graphics.com.

STORAGE:

- Shelf life (before application):

The shelf life of this film is 2 years when stored unopened in its original packaging at a temperature ranging from +15 °C to +25 °C (+59 °F to +77 °F) with relative humidity between 30 % and 70 %.

- After use:


Roll correctly closed using a Tiro-like adhesive tape in its original packaging at a temperature ranging from +15 °C to +25 °C (from +59 °F to +77 °F) and a relative humidity between 30 % and 70 %.

INDICATIVE DURABILITIES: (Central European climate)

- Vertical outdoor exposure, not cleaned: up to 1 year.
- Cleaned film: dependent on the method and frequency of the cleaning.
- The durabilities indicated below are obtained specifically in vertical ($\pm 10^\circ$) outdoor exposure. Other positions accentuate climatic influences and an alteration in gloss, colour or even a slight dusting may appear. Application to the vehicle bonnet is particularly severe, due to the horizontal exposure and the heating provided by the engine.
- The pigmentation (colour) of the PVC affects the stability duration of the dyes. An estimate of such a durability is confirmed by accelerated UV ageing and natural exposure tests.
- To estimate the durabilities for non-vertical exposure, divide the durabilities by the factors given in the table below.

Exposure	Dividing factor ⁽²⁾ Central European climate
Non-vertical exposure	2
Horizontal exposure ($\pm 10^\circ$)	2.8

Chart: Dividing factor

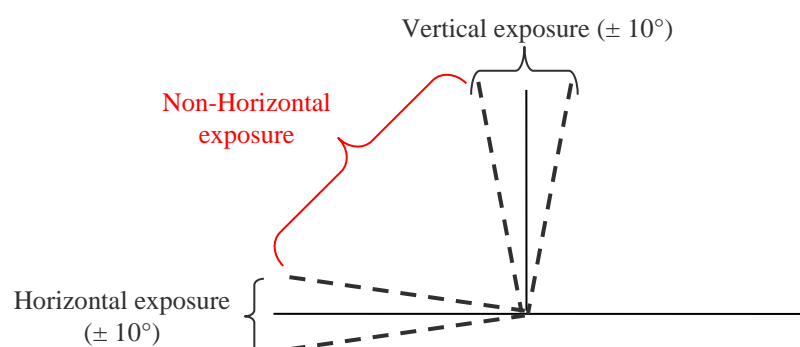

- The real durability of a product depends on a large number of parameters, including, among others, the quality and preparation of the substrate, the exposure (environment, climate, exposure angle), the film maintenance, and the degree of pollution.

To find the indicative durabilities of the films for the country of exposure, please refer to the "Conversion rules for indicative durabilities according to geographical area" chart available under Durability in the "Professionals" pages of our site www.hexis-graphics.com.

NOTES:

(1) If an important degradation of the film (due to prolonged exposure to sunlight, weathering, polluting agents) appears (discolouration, powdering, tanning...), it must be immediately removed from the vehicle in order to avoid any damage to the underlying paintwork.

(2) The durabilities indicated in this document do not constitute a binding guarantee. They are an estimate of the time during which the film retains a correct surface finish, from a conventional viewing distance.

A slight and gradual change in colour and gloss is an unavoidable and natural phenomenon inherent to the natural breakdown of the materials.

Due to the great variety of substrates and the growing number of new applications, the installer must check the suitability of the media for each application.

The measuring methods for the standards quoted above served as basis for the development of our own measuring methods which are available on request. Please feel free to contact us to get the latest instructions in use.

All the published information is based on measurements regularly performed in the laboratory. It does not however constitute a binding guarantee. The seller cannot be held liable for indirectly related damages and assumes no liability for claims that are higher than the replacement value of the purchased product. All specifications are subject to potential changes without prior notice. Our specifications are automatically updated on our website www.hexis-graphics.com.